

TL-C02

Micro DC Brushless Pump

Typical Applications

- Water Heater
- Intelligent Toilet
- Boosting System
- Water Circulation
- Drinking Industry




Specification

Model	Product Code	Max Flow Rate (L/Min)	Max Water Head (M)	Voltage (VDC)	Current (A)	Power (W)
TL-C02	TL-C02-A12-2704	27	4	12	1.8	21.6
	TL-C02-A12-3408	34	8	12	4.5	54
	TL-C02-A24-3206	32	6	24	1.45	34.8
	TL-C02-A24-3709	37	8.5	24	2.5	60

Customization: 1. /H High temperature 100 °C (212°F) 2. /S Submersible, liquid ≤50°C 3. /FG (RPM) signal wire
4. /PV Powered by solar panel directly 5. /PWM or /5V speed control

Curve & Dimension

TL-C02 Performance

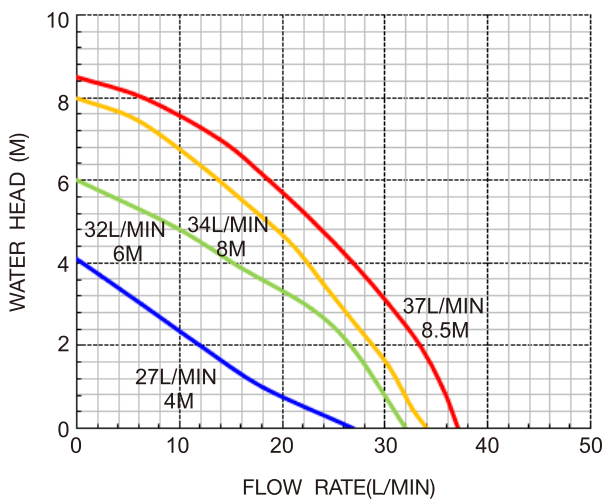

Dimension (mm)

